




Motorola V180 Keypad Replacement

Written By: Tyler Knisley

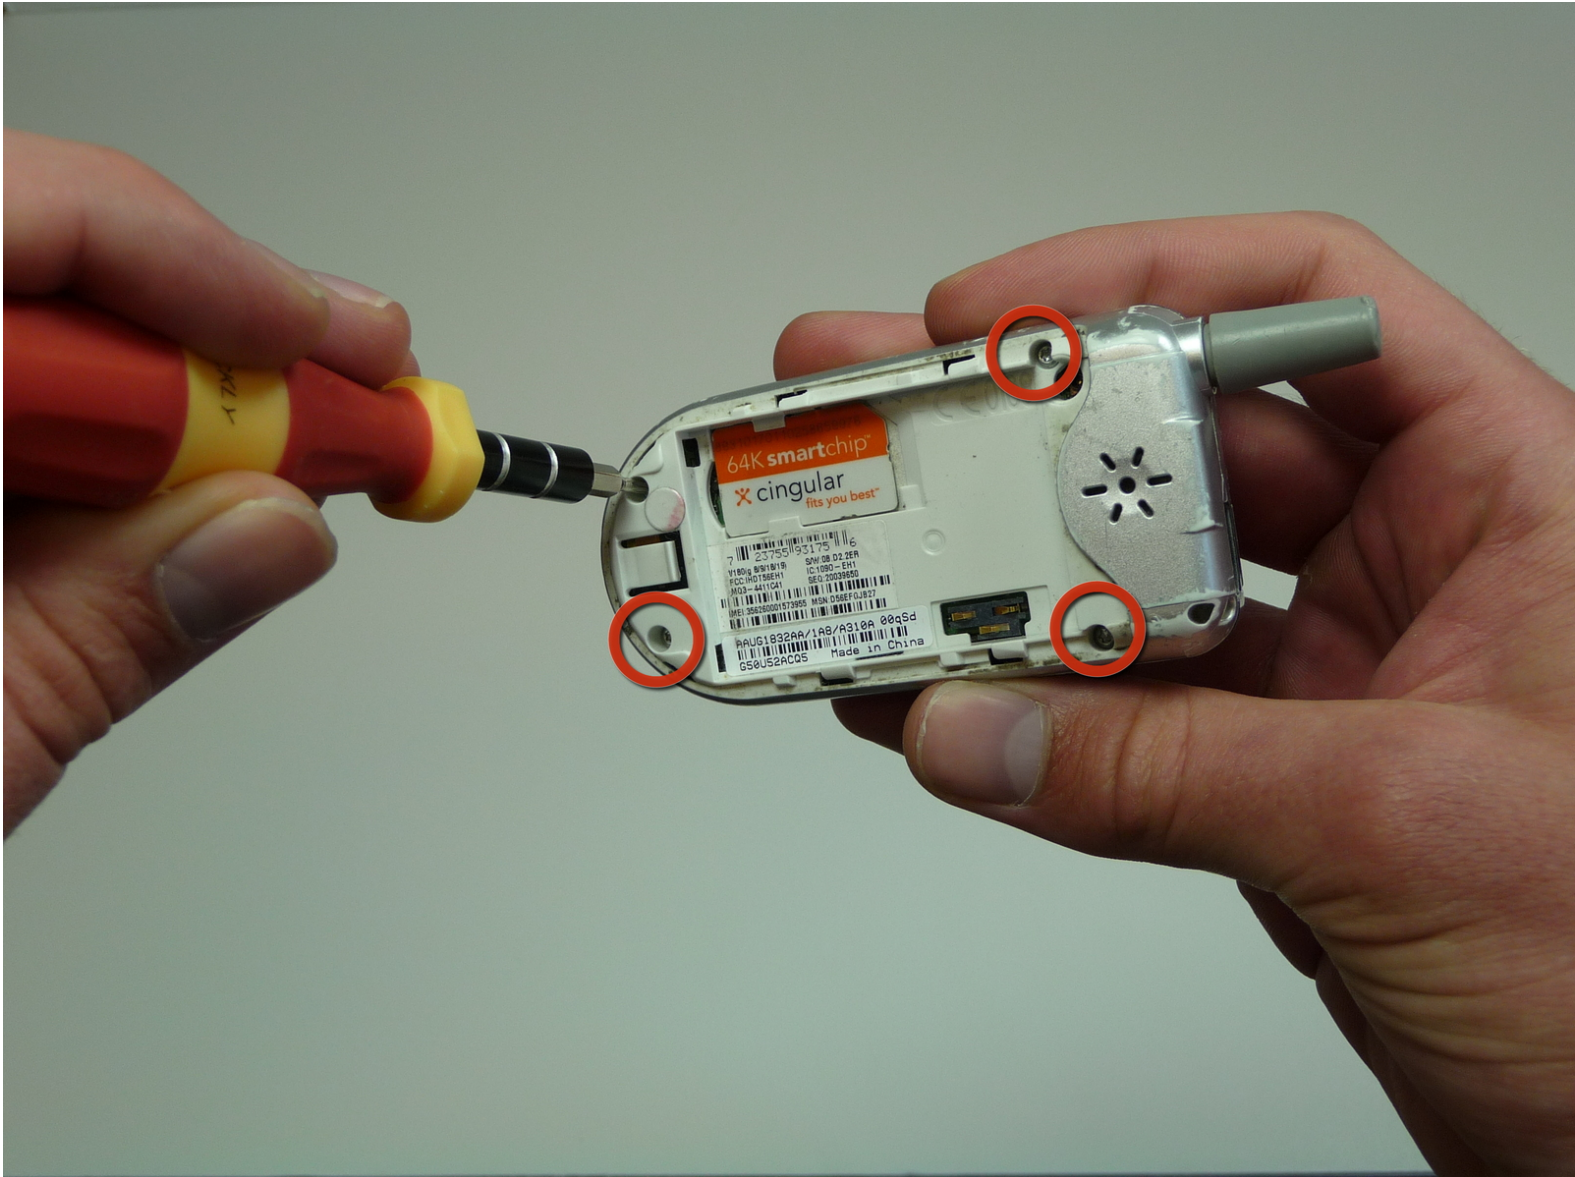

INTRODUCTION



How to replace the keypad.



TOOLS:




- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery

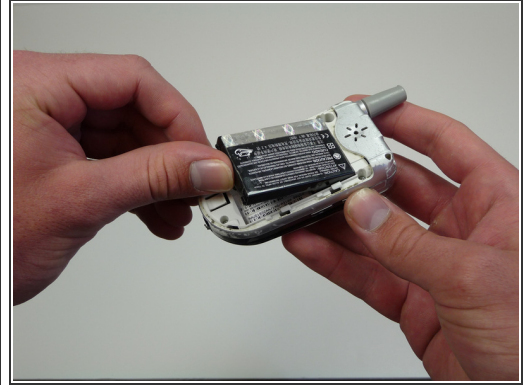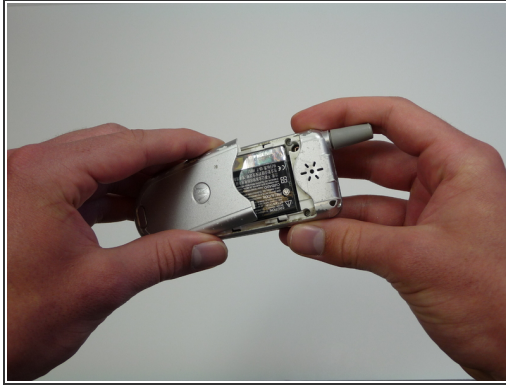

- Flip over the phone, press down the button and slide off the back cover.
- Remove the battery.

Step 2 — Keypad

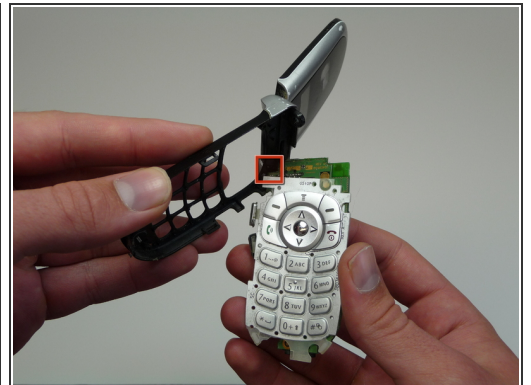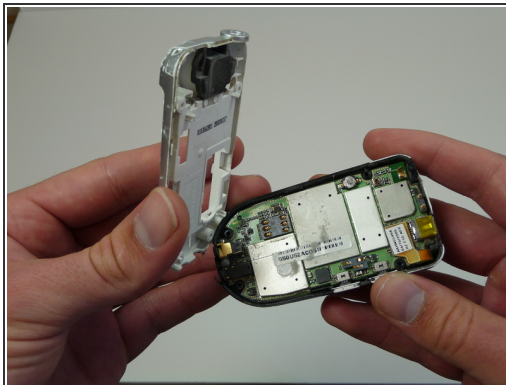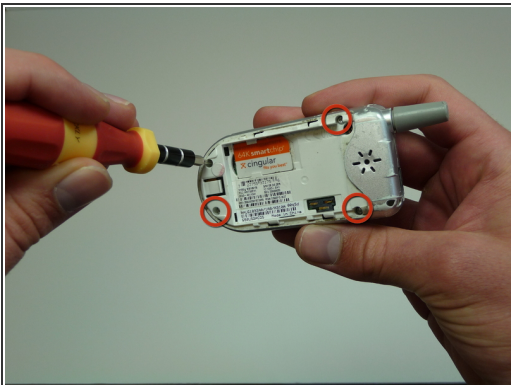

- Locate the four screws on the back of the phone.
- Using your T6 Torx Screwdriver, unscrew these screws.
- Remove the SIM card located on the back of the phone.

⚠ A ribbon near the antenna is still attached to the motherboard. Do not break this ribbon.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-03 03:08:09 AM.